


**NEW!**

# LLUB (Long life Ultra Bright) White led Backlight 150x40

LESS THAN 20% LUMINANCE LOSS AFTER 100 000 HOURS (\*)  
LESS THAN 10% CHROMATICITY SHIFT AFTER 100 000 HOURS (\*)

00000456 : PHLOX - LEDW - BL - 150x40 - LLUB - Q - 1R - 24V - V2

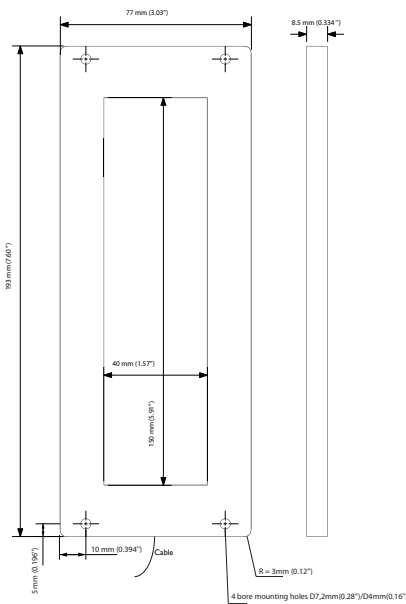


## Illumination

Luminance minimum	<b>≥53 000 cd/m<sup>2</sup> continuous mode</b>
Uniformity minimum	<b>≥95% (+/- 10%)</b>
Source Type	White LED
Colour Temperature	5700°K (+/-500)
Light Angular Distribution	30° 1/2 angle
Expected Life	<b>&gt; 100 000 hours</b>

Scan for DS  
and 3D Files !



## Electrical

Input Voltage	24 VDC (continuous mode)
Input Current	≤350 mA (continuous mode)
Cable length	2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
Connector	None
Cable pinout	
CE Conformity	Yes
Strobe mode	Available in option

## Outer unit

L x W x H	193 x 77 x 8.5 mm (7,6 x 3,03 x 0.314")
Housing Material	Black Anodized Aluminium
Weight	240 g (8.47 oz)
Mounting	4 bore holes (D7,2mm for th first 3.5mm of height ,D4 for the other 5mm)

## Environmental

Max. Operating Humidity	95% non-condensing	
Operating Temperature	50°C (122°F) max	
Storage Temperature	60°C (140°F) max	
Shelf life	12 months from date of purchase	
Max.temp.on housing	+80°C (+176°F)	

Do not cover the backlight when it's switched on.

## Accessories

**LED Dimmer:** 28V-5A very compact and easy to use  
Product key: PHLOX DIM LIGHT



**Power supply:** 110V and 220V  
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

**LED Strober:** 28V - 5A (up to 40A in pulse mode)  
Pulse width between 2µs and 10ms  
Product key: PHLOX STROBE LIGHT

CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

**RoHS** directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

January 15th, 2025

LLUB Backlights by PHLOX® offer the **best life cycle**, the **best chromaticity stability** and the **best luminance on the market**, all in an ultra compact and **IP-63 body**. PHLOX® is the only manufacturer to provide unifor-mity and luminance datas on the quality control seal positioned at the back of every backlight.


## DESIGNED

### FOR YOUR APPLICATION

Bottle inspection (glass and plastic)  
Particle measurement  
Picture digitalization  
Dimensional control  
Shaping control  
Quality control with transparency.

## & YOUR INDUSTRIAL SECTOR

Glassmaking  
Pharmaceutical/Cosmetics  
Automotive  
Agribusiness  
Electronics  
Aeronautics and space.

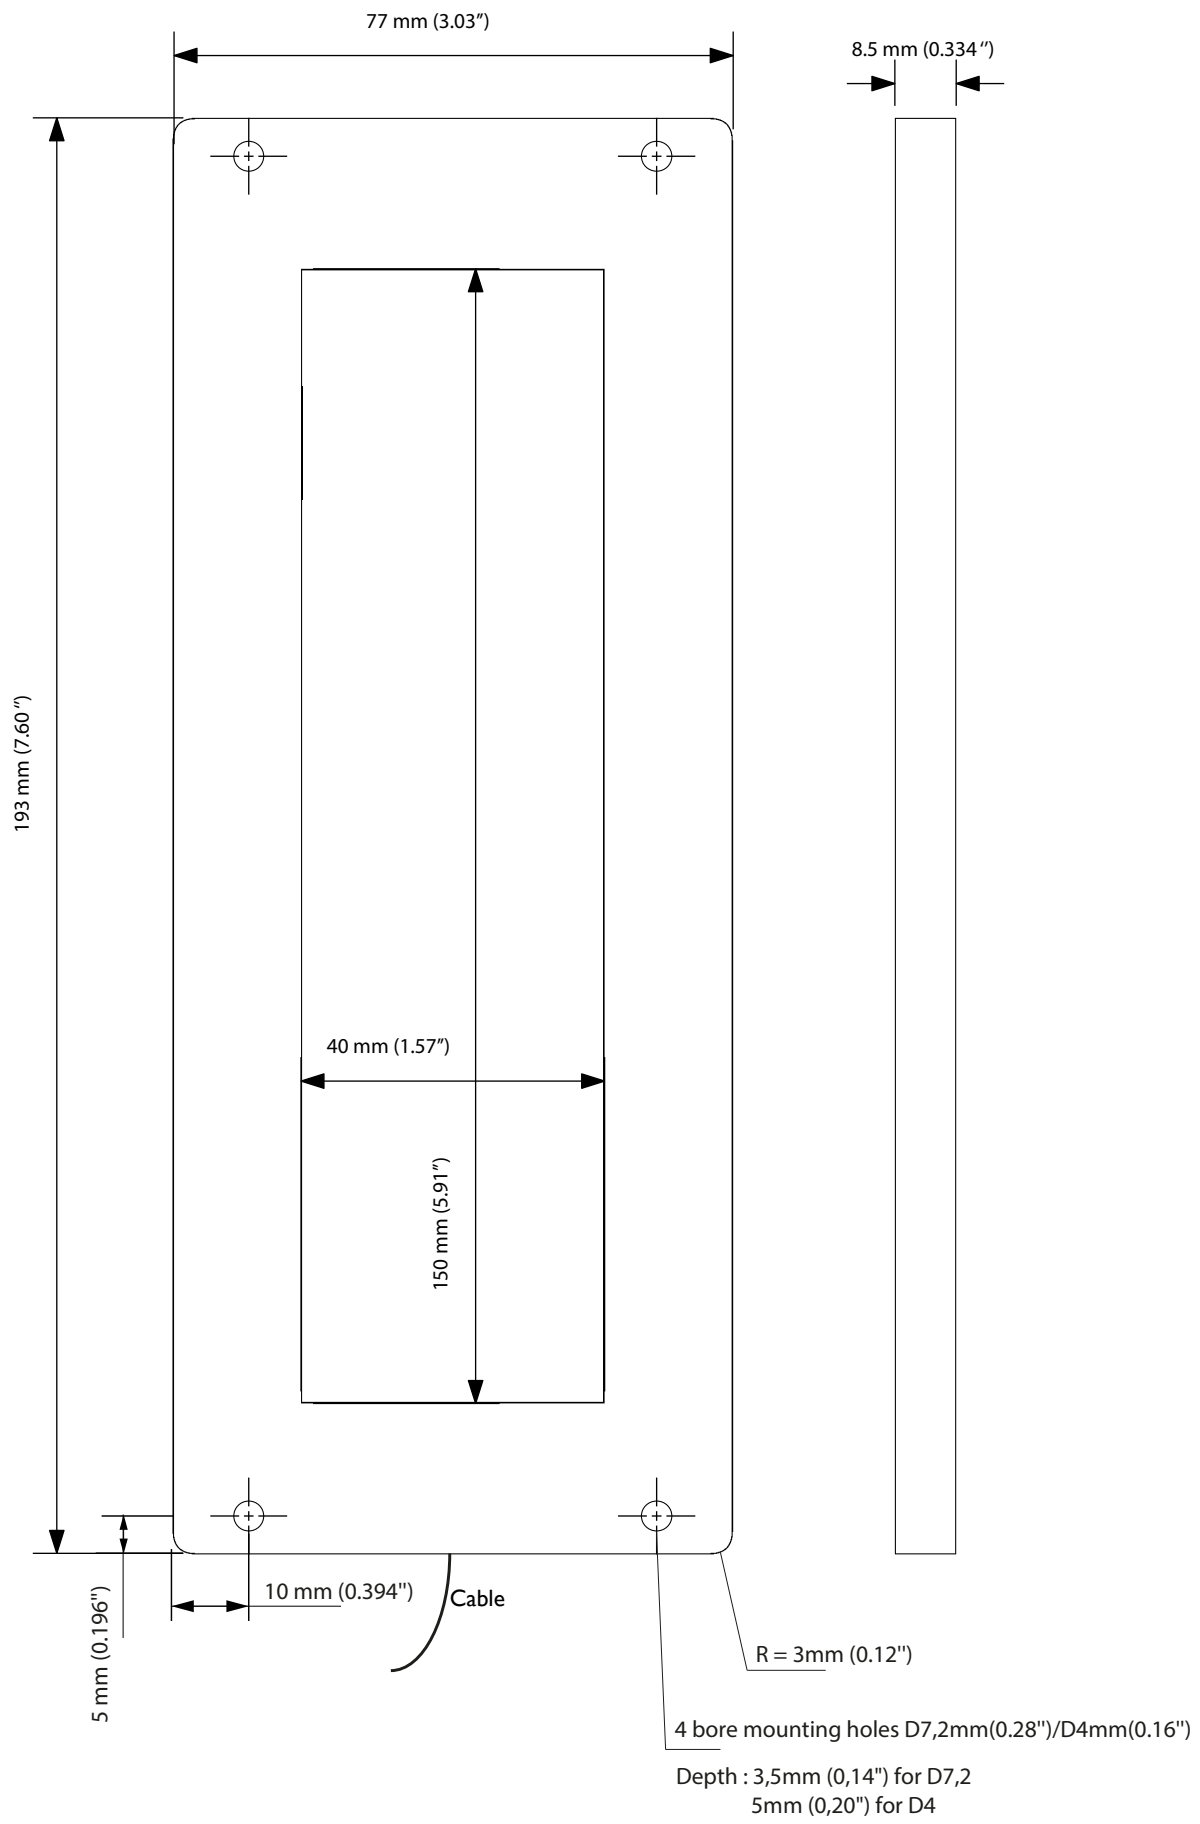

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT	
00000456 : PHLOX-LEDW-BL-150X40-LLUB-Q-1R-24V-V2	
TEL: 04 42 90 76 20 FAX: 04 42 90 76 21	