


NEW!

SLLUB (Super Long life Ultra Bright) White led Backlight 160x120-V2

LESS THAN 20% LUMINANCE LOSS AFTER 100 000 HOURS (*)
LESS THAN 10% CHROMATICITY SHIFT AFTER 100 000 HOURS (*)

00000472 : PHLOX - LEDW - BL - 160x120 - SLLUB - Q - 1R - 24V-V2

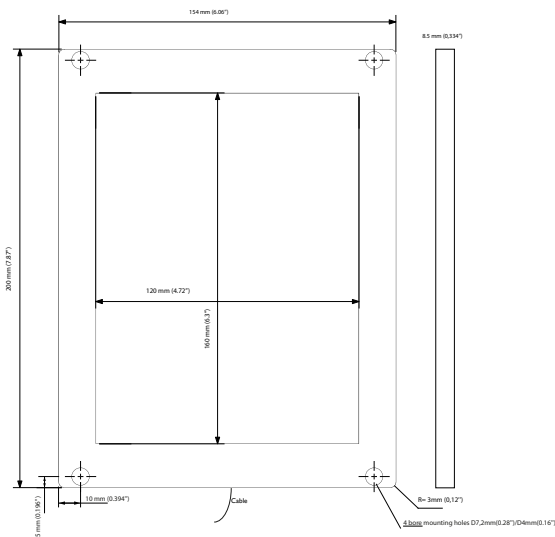

Illumination

Luminance minimum

≥84 000 cd/m² continuous mode
(up to 136 000 minimum luminance in strobe mode)

Uniformity minimum

≥95% (+/- 10%)

Source Type
Colour Temperature
Light Angular Distribution
Expected Life

White LED
5700°K (+/-500)
30° 1/2 angle
> 100 000 hours

Scan for DS
and 3D Files !



Electrical

Input Voltage
Input Current
Cable length
Connector
Cable pinout
CE Conformity
Strobe mode

24 VDC (continuous mode)
≤1.2 A (continuous mode)
2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
None
Yes
Max. Cur: 4.8A / Pulse Width: 10ms / Duty Ratio: 1/10

Outer unit

L x W x H
Housing Material
Weight
Mounting


200 x 154 x 8.5 mm (7.87 x 6.06 x 0.334")
Black Anodized Aluminium
400 g (14.11 oz)
4 bore holes (D7,2mm for the first 3.5 mm of height, D4 for the other 5mm)

Environmental

Max. Operating Humidity
Operating Temperature
Storage Temperature
Shelf life
Max.temp.on housing

95% non-condensing
50°C (122°F) max
60°C (140°F) max
12 months from date of purchase
+80°C (+176°F)

area of temperature measurement
30mm all along the edges of the back of
the black anodized aluminium housing
(see image)



Do not cover the backlight when it's switched on.

Accessories

LED Dimmer: 28V-5A very compact and easy to use
Product key: PHLOX DIM LIGHT



Power supply: 110V and 220V
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

LED Strobe: 28V - 5A (up to 40A in pulse mode)
Pulse width between 2µs and 10ms
Product key: PHLOX STROBE LIGHT



CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

RoHS directive compliant


Each PHLOX Backlight is provided with:
- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

February 18th, 2025

SLLUB Backlights by PHLOX® offer the best life cycle, the best chromaticity stability and the best luminance on the market, all in an ultra compact and IP-63 body. PHLOX® is the only manufacturer to provide uniformity and luminance datas on the quality control seal positioned at the back of every backlight.

DESIGNED FOR YOUR APPLICATION
Bottle inspection (glass and plastic)
Particle measurement
Picture digitalization
Dimensional control
Shaping control
Quality control with transparency.

& YOUR INDUSTRIAL SECTOR
Glassmaking
Pharmaceutical/Cosmetics
Automotive
Agribusiness
Electronics
Aeronautics and space.

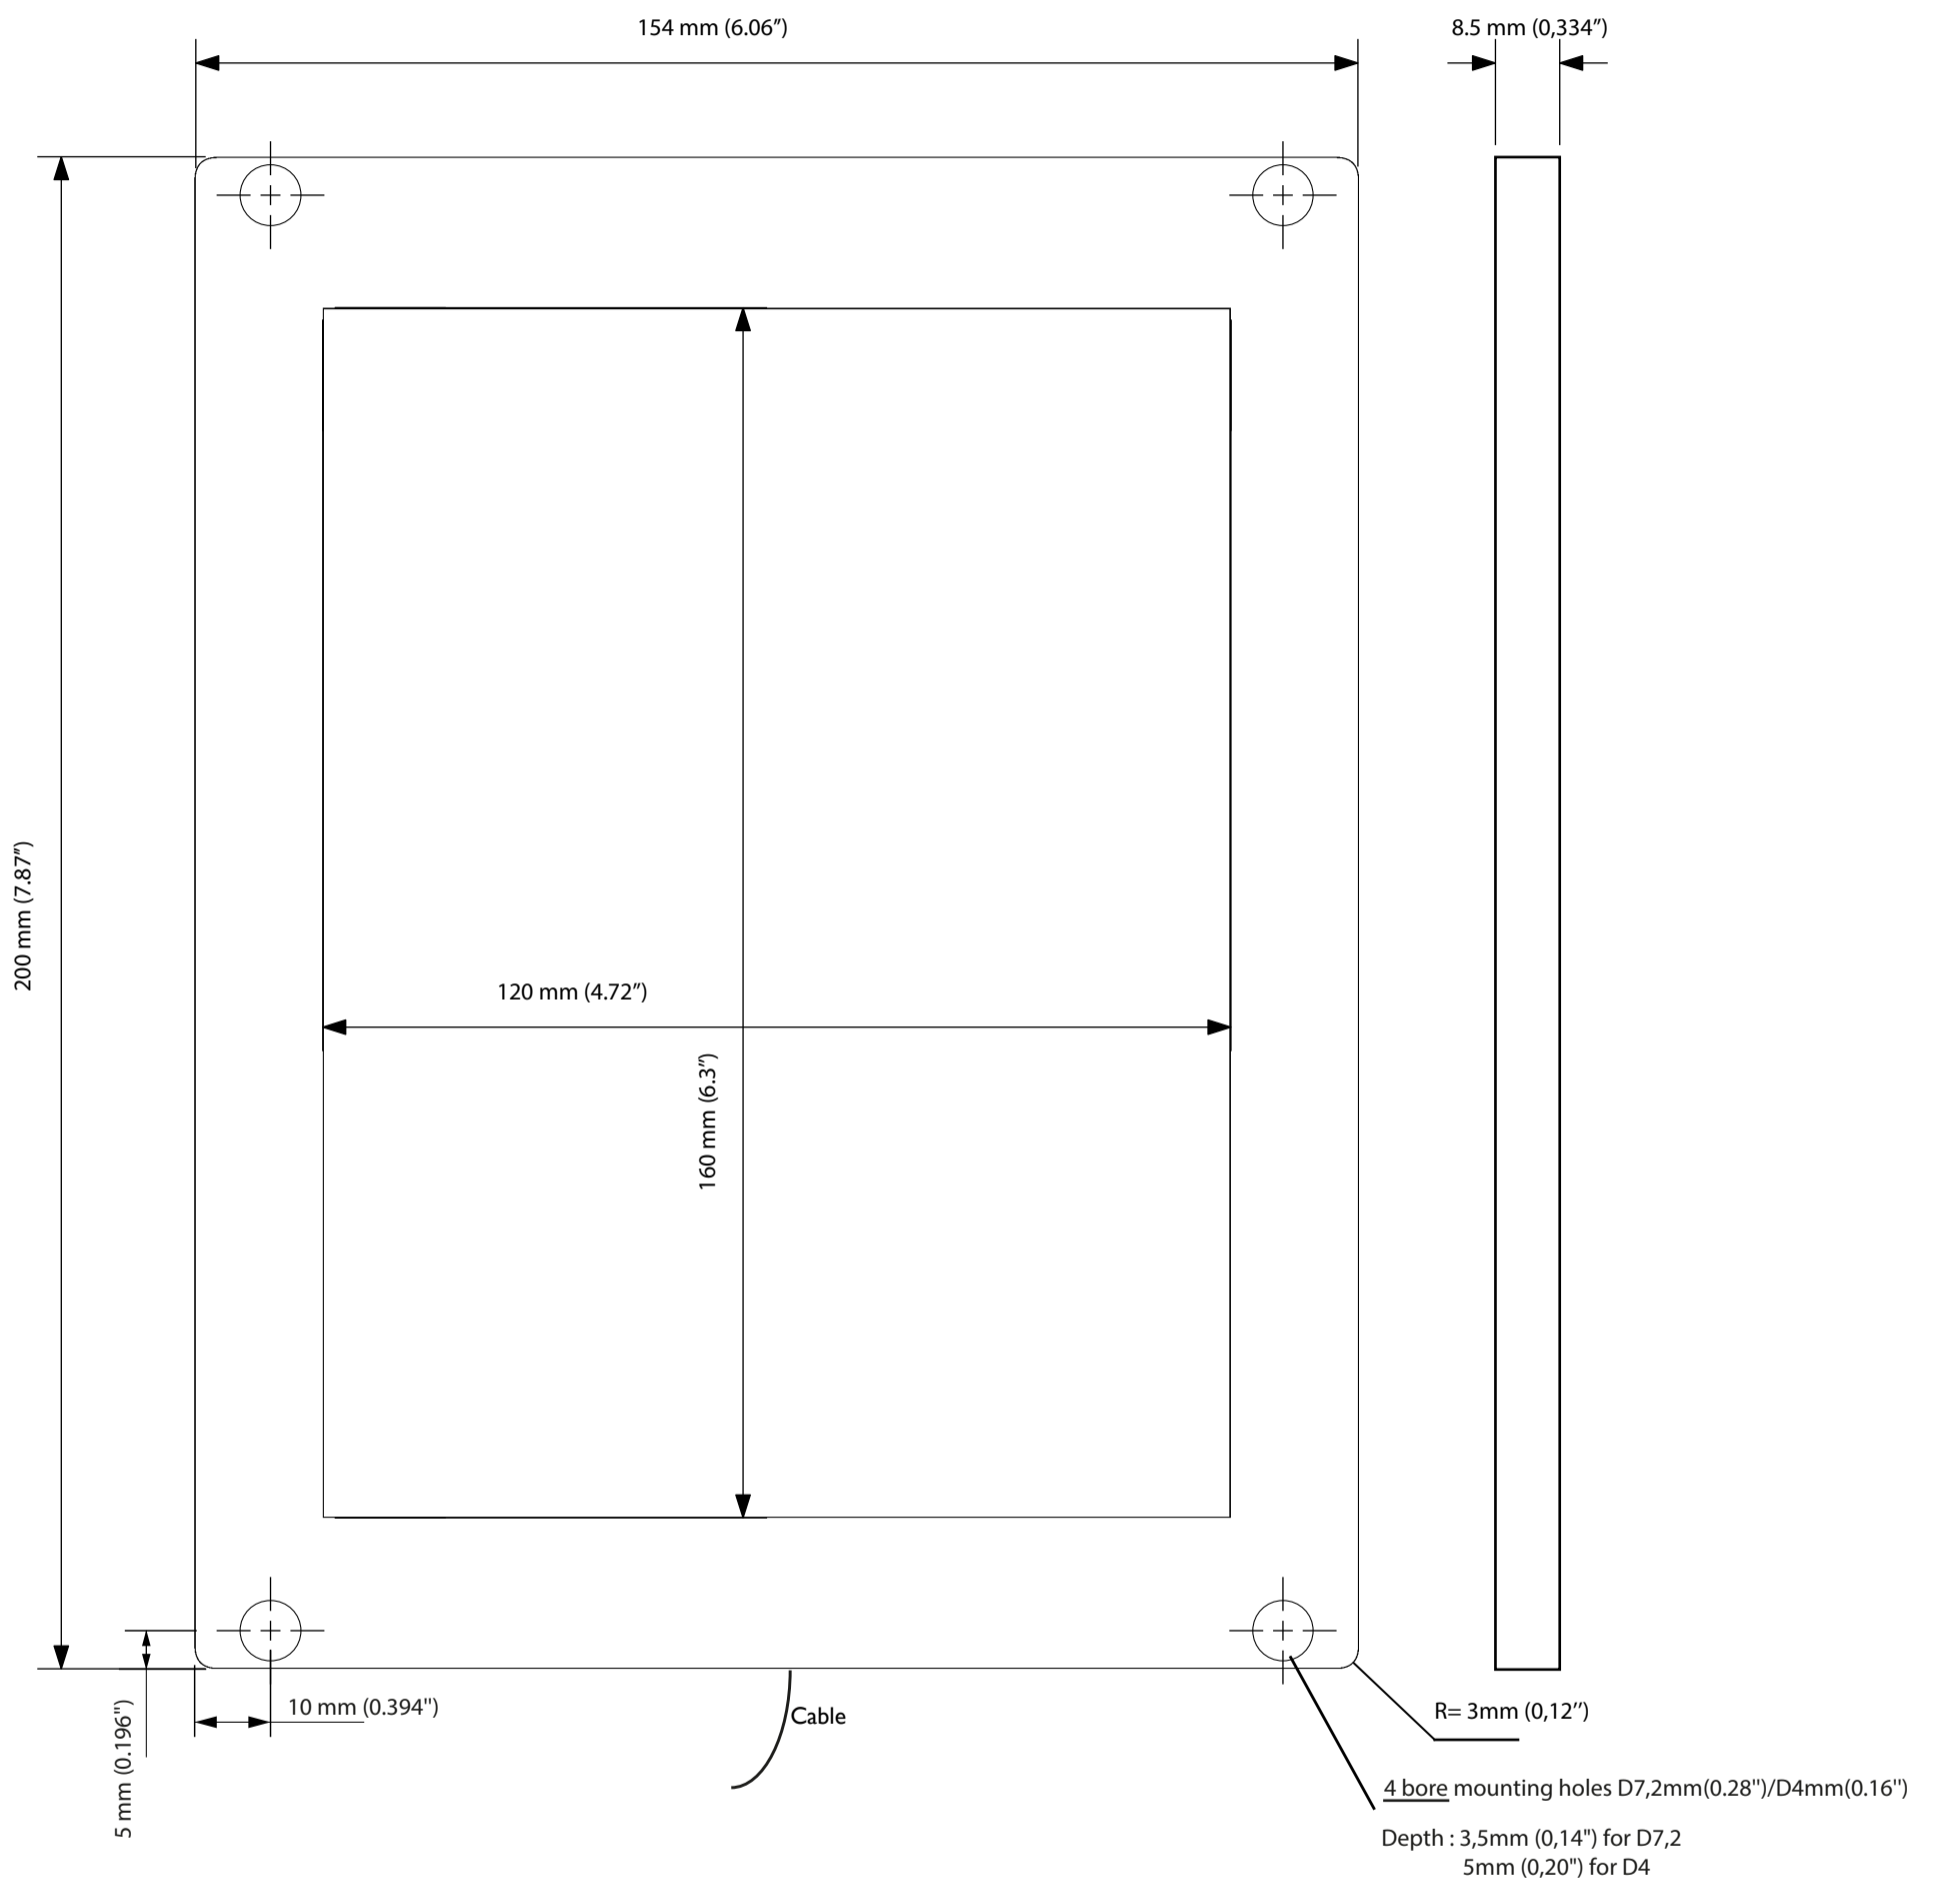

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

00000472 : PHLOX-LEDW-BL-160X120-SLLUB-Q-1R-24V-V2

TEL: 04 42 90 76 20
FAX: 04 42 90 76 21

