

Manufacturer	Source colour	Light Output Area/Length	Injection process	Input voltage
PHLOX	LEDIR940	BL - 100x100	LLUB	Q - 1R - 24V
Source type	Product type	Range	Number of light sources/rows per cicu	

PHLOX® EXCLUSIVE LIGHT PROCESS  
WORLDWIDE PATENT ISSUED

# 940nm

## LLUB (Long life Ultra Bright) Infrared led Backlight 100x100

PHLOX - LEDIR - BL - 100x100 - LLUB - Q - 1R - 24V - 940

### Illumination

Radiance minimum  
Uniformity minimum  
Source Type  
Wavelength  
Light Angular Distribution  
Expected Life

≥11 W/m<sup>2</sup>.sr continuous mode  
≥95% (+/- 10%)  
Infrared LED  
940 nm (+/- 15)  
30° 1/2 angle  
> 100 000 hours

Scan for DS  
and 3D Files !



### Electrical

Input Voltage  
Input Current  
Cable length  
Connector  
Cable pinout  
CE Conformity  
Strobe mode

24 VDC (continuous mode)  
≤350 mA (continuous mode)  
2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")  
None  
±  
Yes  
Max. Cur: 0,88 A / Pulse Width: 10ms / Duty Ratio: 1/10

### Outer unit

L x W x H  
Housing Material  
Weight  
Mounting


140 x 134 x 8.5 mm (5.51 x 5.28 x 0.334")  
Black Anodized Aluminium  
400 g (14.1 oz)  
4 bore holes (D8 for the first 3.5 mm of height, D4 for the other 5 mm)

### Environmental

Max. Operating Humidity  
Operating Temperature  
Storage Temperature  
Shelf life  
Max. temp. on housing

95% non-condensing  
50°C (122°F) max  
60°C (140°F) max  
12 months from date of purchase  
+80°C (+176°F)

area of temperature measurement  
30mm all along the edges of the back of  
the black anodized aluminium housing  
(see image)



Do not cover the backlight when it's switched on.

### Accessories

**LED Dimmer:** 28V-5A very compact and easy to use  
Product key: PHLOX DIM LIGHT

**Power supply:** 110V and 220V  
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

**LED Strober:** 28V - 5A (up to 40A in pulse mode)  
Pulse width between 2µs and 10ms  
Product key: PHLOX STROBE LIGHT




CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

**RoHS** directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity
- Seal of quality on the back

September 9, 2022

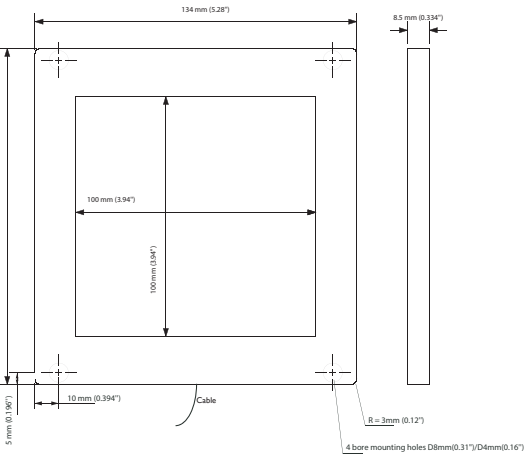

LLUB Backlights by PHLOX® offer the best life cycle and the best uniformity on the market, all in an ultra compact and IP-65 body.

PHLOX® is the only manufacturer to provide uniformity and radiance datas on the quality control seal positioned at the back of every backlight.


### DESIGNED

#### FOR YOUR APPLICATION

- Bottle inspection (glass and plastic)
- Particle measurement
- Dimensional control
- Shaping control
- Quality control with transparency.

### & YOUR INDUSTRIAL SECTOR

- Glassmaking
- Pharmaceutical/Cosmetics
- Automotive
- Agribusiness
- Electronics
- Aeronautics and space.

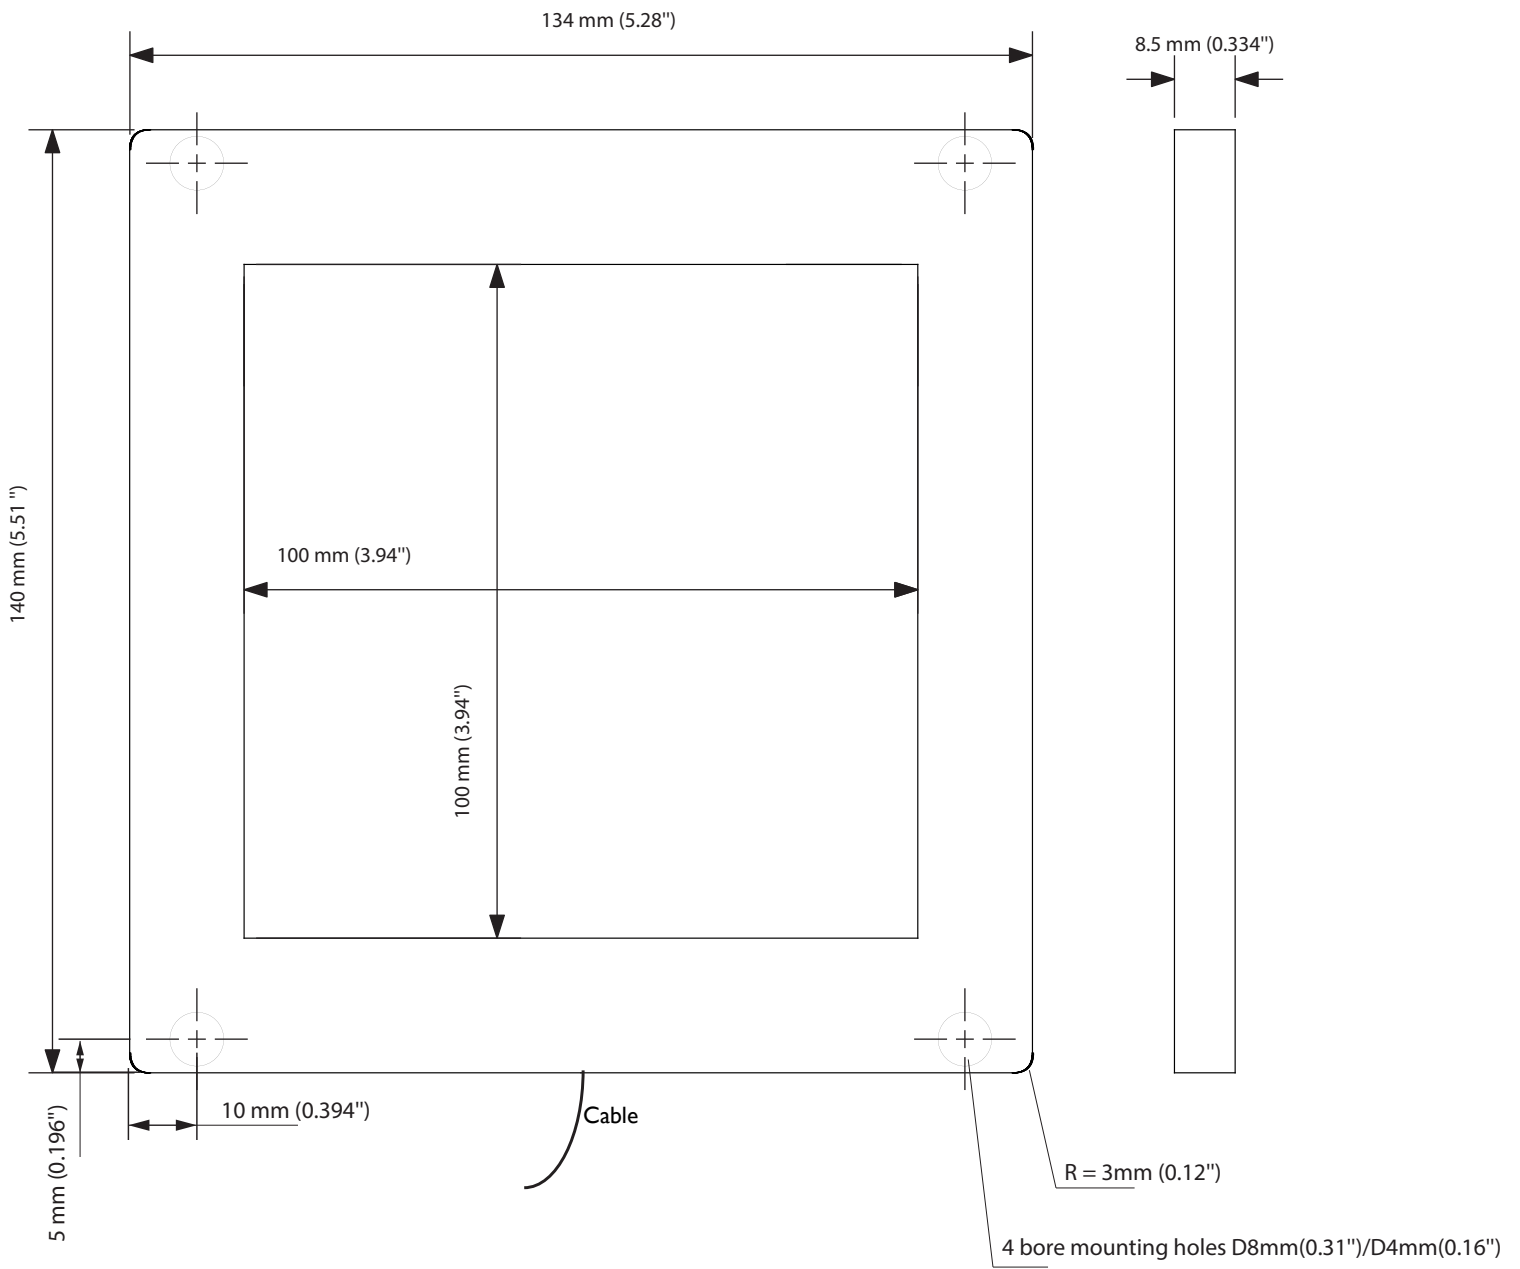

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

PHLOX-LEDIR-BL-100X100-LLUB-Q-1R-24V

TEL: 04 42 90 76 20  
FAX: 04 42 90 76 21

