

**NEW!**

# LLUB (Long life Ultra Bright) Infrared led Backlight 200x200

PHLOX - LEDIR - BL - 200x200 - LLUB - Q - 1R - 24V

## Illumination

Radiance minimum  
Uniformity minimum  
Source Type  
Wavelength  
Light Angular Distribution  
Expected Life

**≥15 W/m<sup>2</sup>.sr continuous mode**  
**≥95% (+/- 10%)**  
Infrared LED  
850 nm (+/- 15)  
30° 1/2 angle  
**> 100 000 hours**

Scan for DS  
and 3D Files !



## Electrical

Input Voltage  
Input Current  
Cable length  
Connector  
Cable pinout  
CE Conformity  
Strobe mode

24 VDC (continuous mode)  
≤450 mA (continuous mode)  
2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")  
None  
None  
Yes  
Max. Cur: 1.8 A / Pulse Width: 10ms / Duty Ratio: 1/10

## Outer unit

L x W x H  
Housing Material  
Weight  
Mounting


240 x 234 x 8.5 mm (9.45 x 9.21 x 0.334")  
Black Anodized Aluminium  
640 g (22.54 oz)  
4 bore holes (D8 for the first 3.5 mm of height, D4 for the other 5 mm)

## Environmental

Max. Operating Humidity  
Operating Temperature  
Storage Temperature  
Shelf life  
Max.temp.on housing

95% non-condensing  
50°C (122°F) max  
60°C (140°F) max  
12 months from date of purchase  
+80°C (+176°F)

area of temperature measurement  
30mm all along the edges of the back of  
the black anodized aluminium housing  
(see image)



Do not cover the backlight when it's switched on.

## Accessories

**LED Dimmer:** 28V-5A very compact and easy to use  
Product key: PHLOX DIM LIGHT

**Power supply:** 110V and 220V  
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

**LED Strober:** 28V - 5A (up to 40A in pulse mode)  
Pulse width between 2µs and 10ms  
Product key: PHLOX STROBE LIGHT




CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

**RoHS** directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity
- Seal of quality on the back

April 02, 2019

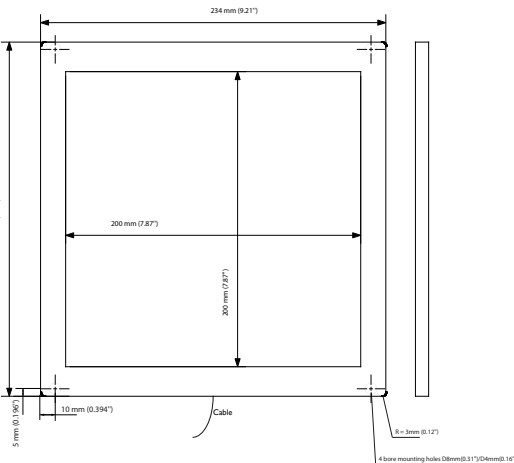

**LLUB Backlights by PHLOX®** offer the **best life cycle and the best uniformity on the market**, all in an ultra compact and **IP-65 body**.


**PHLOX®** is the only manufacturer to provide uniformity and radiance datas on the quality control seal positioned at the back of every backlight.

## DESIGNED FOR YOUR APPLICATION

- Bottle inspection (glass and plastic)
- Particle measurement
- Dimensional control
- Shaping control
- Quality control with transparency.

## & YOUR INDUSTRIAL SECTOR

- Glassmaking
- Pharmaceutical/Cosmetics
- Automotive
- Agribusiness
- Electronics
- Aeronautics and space.

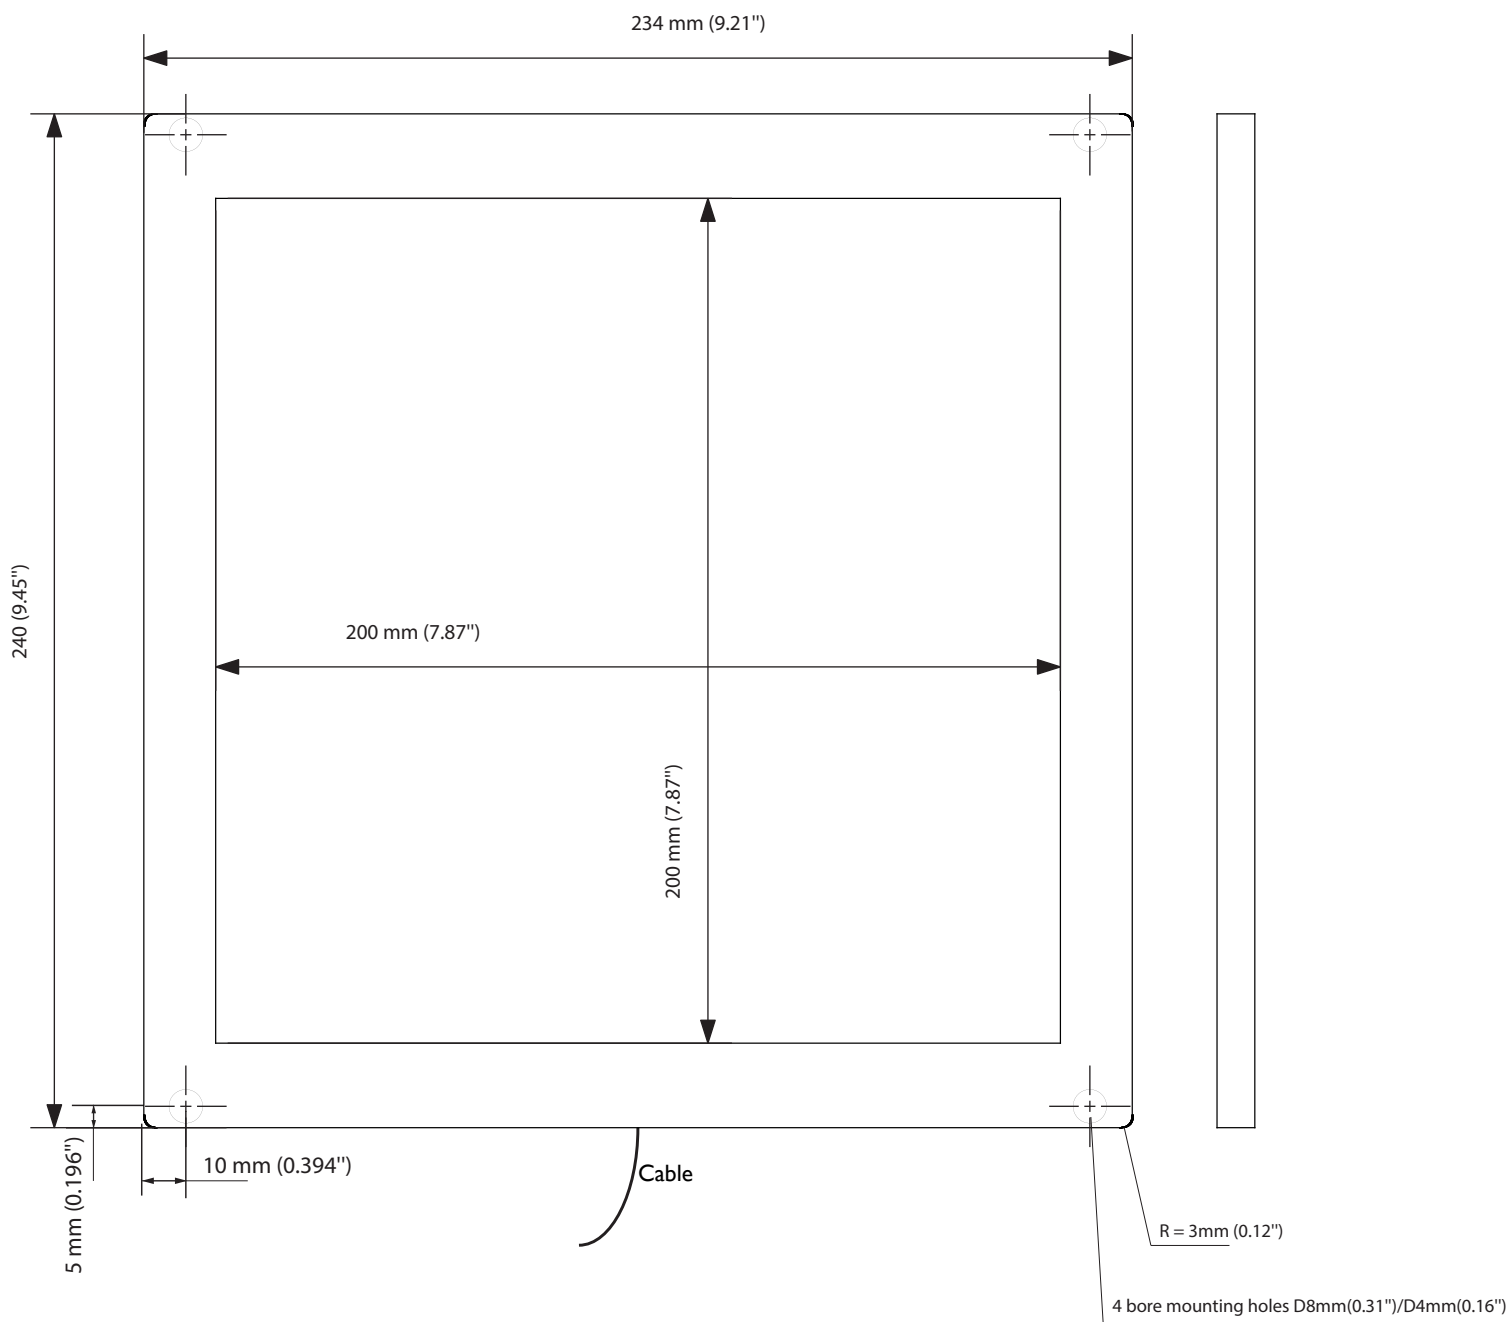

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

PHLOX-LEDIR-BL-200X200-LLUB-Q-1R-24V

TEL: 04 42 90 76 20  
 FAX: 04 42 90 76 21

