Source type Product type

Range Number of light sources' rows per cicu


PHLOX® EXCLUSIVE LIGHT PROCESS WORLDWIDE PATENT ISSUED



# LLUB (Long life Ultra Bright) Red led Backlight 100x100

LESS THAN 20% LUMINANCE LOSS AFTER 100 000 HOURS (\*)

00000434: PHLOX - LEDR - BL - 100x100 - LLUB - Q - 1R - 24V - V2



### Illumination

Luminance minimum Uniformity minimum

Source Type Wavelength Light Angular Distribution

**Expected Life Electrical** 

Input Voltage

Input Current

Cable length

Cable pinout **CE Conformity** 

Connector

≥17 000 cd/m<sup>2</sup> continuous mode ≥95% (+/- 10%)

Red LED 625 nm(+/- 15) 30° 1/2 angle > 100 000 hours

24 VDC (continuous mode) ≤380 mA (continuous mode) 2 M - Ø 2.7 mm (6.56 ft - Ø 0.10") None

Yes

Available in option



## Strobe mode **Outer unit**

 $L \times W \times H$ Housing Material Weight

**Environmental** 

Max. Operating Humidity

Operating Temperature

StorageTemperature

Max.temp.on housing

Mounting

Shelf life

Accessories

140 x 134 x 8.5 mm (5.51 x 5.28 x 0.334")

Black Anodized Aluminium

95% non-condensing 50°C (122°F) max

60°C (140°F) max

+80°C (+176°F)

400 g (14.1 oz)

4 bore holes (D7,2mm for the first 3.5 mm of height, D4 for the other 5 mm)

12 months from date of purchase

LLUB Backlights by PHLOX® offer the best life cycle, and the best luminance on the market, all in an ultra compact and IP-63 body. PHLOX® is the only manufacturer to provide uniformity and luminance datas on the quality control seal positioned at the back of every backlight.

### DESIGNED

### FOR YOUR APPLICATION

Bottle inspection (glass and plastic) Dimensional control

**LED Dimmer:** 28V-5A very compact and easy to use Product key: PHLOX DIM LIGHT

Do not cover the backlight when it's switched on.

Power supply: 110V and 220V

Product key: ÁLIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

LED Strober: 28V - 5A (up to 40A in pulse mode) Pulse width between 2 us and 10 ms Product key: PHLOX STROBE LIGHT

RoHS directive compliant

CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

January 15th, 2025

Particle measurement Picture digitalization

Shaping control

Quality control with transparency.

### & YOUR INDUSTRIAL SECTOR

Glassmaking Pharmaceutical/Cosmetics Automotive Agribusiness **Electronics** Aeronautics and space.


PHLOX • 360 rue Louis Berton - ZAC du Quartier de l'Enfant 1 3290 AIX-EN-PROVENCE - FRANCE Tel: +33 (0)4 42 90 76 20 - e-mail: sales@phlox-gc.com



area of temperature measurement

(see image)

30mm all along the edges of the back of the black anodized aluminium housing

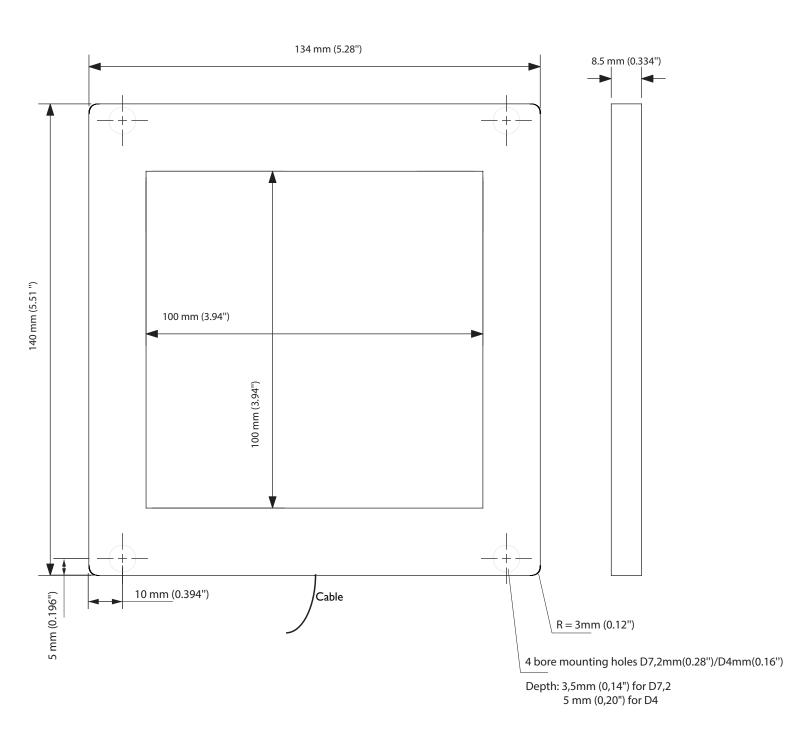

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

00000434 : PHLOX-LEDR-BL-100X100-LLUB-Q-1R-24V-V2

TEL: 04 42 90 76 20
FAX: 04 42 90 76 21

PHLOX