

Manufacturer	Source colour	Light Output Area/Length	Injection process	Input voltage										
PHLOX	-	LEDW	-	BL	-	3ATI	-	A	-	Q	-	1R	-	CUR
	Source type	Product type						Range					Number of light sources' rows per cicu	

PHLOX® EXCLUSIVE LIGHT PROCESS
WORLDWIDE PATENT ISSUED

DATA SHEET

- 36 months warranty*
- Certificate of uniformity and luminance
- Seal of quality on the back

Avionics

White led Backlight for 3 ATI LCD 0° & 45°

PHLOX-LEDW-BL-3ATI-A-Q-1R-CUR

Illumination

Luminance on the backlight (typical)

≥12 000 cd/m²

Luminance on the backlight (max.)

≥29 700 cd/m²

Luminance through LCD (typical)

≥1 320 cd/m² (11%)

Uniformity minimum

≥95% (+/- 10%)

Source Type

White LED

Chromaticity

5700° K (+/- 1000)

x = 0.329 (±0.025) ; y = 0.3417 (± 0.025)

Light Angular Distribution

Lambertian (180°)

Expected Life (with typical luminance)

50 000 hours

Electrical

Input Current (typical)

0.12 A

Input Current (max.)

0.3 A

Power consumption (typical)

2.36 W

Power consumption (max.)

6.27 W

CE Conformity

Yes

Outer unit

L x W x H

77 x 77 x 11 mm (3.03 x 3.03 x 0.43") ± 0.25mm

Housing Material

SURTEC 650 Anodized Aluminium

Weight

96 g (3.38 oz)

Environmental

Operating temperature

-30 / + 80°C (-22 / +176° F)

Max. Operating Humidity

95% non-condensing

Storage Temperature

-55 / +90°C (-67 / +194°F)


Shelf life

12 months from date of purchase

Max.temp.on housing

+120 °C (+248°F)

area of temperature measurement
30mm all along the edges of the back of
the anodized aluminium backlight
(see image)



Heat sink is under Purchaser's responsibility. A heat dissipation may be needed in order to not exceed the maximum temperature on the housing stated above.

Do not cover the backlight when it's switched on.

Maintenance

To remove dust from the lighting surface, switch the backlight off before starting work, use exclusively ALTUGLAS CLEANER, on a clean, soft, lint-free cotton cloth. Do not press hard on the lighting surface.

*Warranty

See our General Conditions of Sales (GCS). For the coverage of our warranty, all the instructions in our GCS, in this Datasheet and on the back of the backlight shall be followed.


Do not disassemble the backlight !

If a problem occurs, send us the backlight serial number and a description of the problem to rma@phlox-gc.com. RMA n° will be sent to you.

CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

RoHS or NON-ROHS if exemption

February 02, 2016

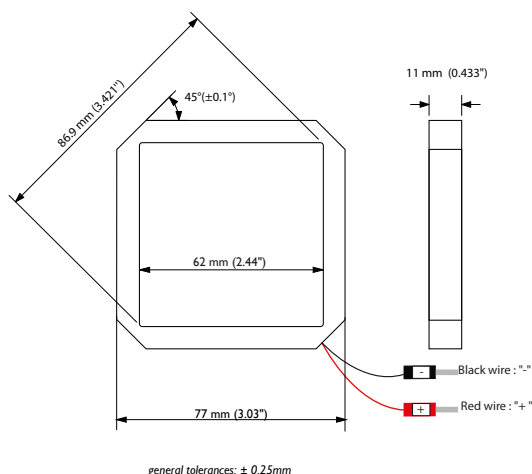


general tolerances: ± 0.25mm


The PHLOX® High Bright white led Backlights a new generation of backlights which enhances the MTBF and the efficiency, superior to competitive systems. PHLOX® technology is the result of several years of research in optics and electronics. This research has led to the filing of several international patents, proof of our technological advance. Our know-how is expressed in the manufacturing of the light guide according to the patented PHLOX® process and in the optimisation of its coupling with the light source, combined with high-grade optical components

PHLOX® Backlights excel in Civilian and Military Airplanes

"First of all, our clients have confidence in the intrinsic qualities of our products, their efficiency and low consumption of energy, obviously their luminance as well as their uniformity, their longevity and compact size..."

Finally, our capacity to rapidly create prototypes (less than 5 weeks from design to delivery) is often a decisive factor."

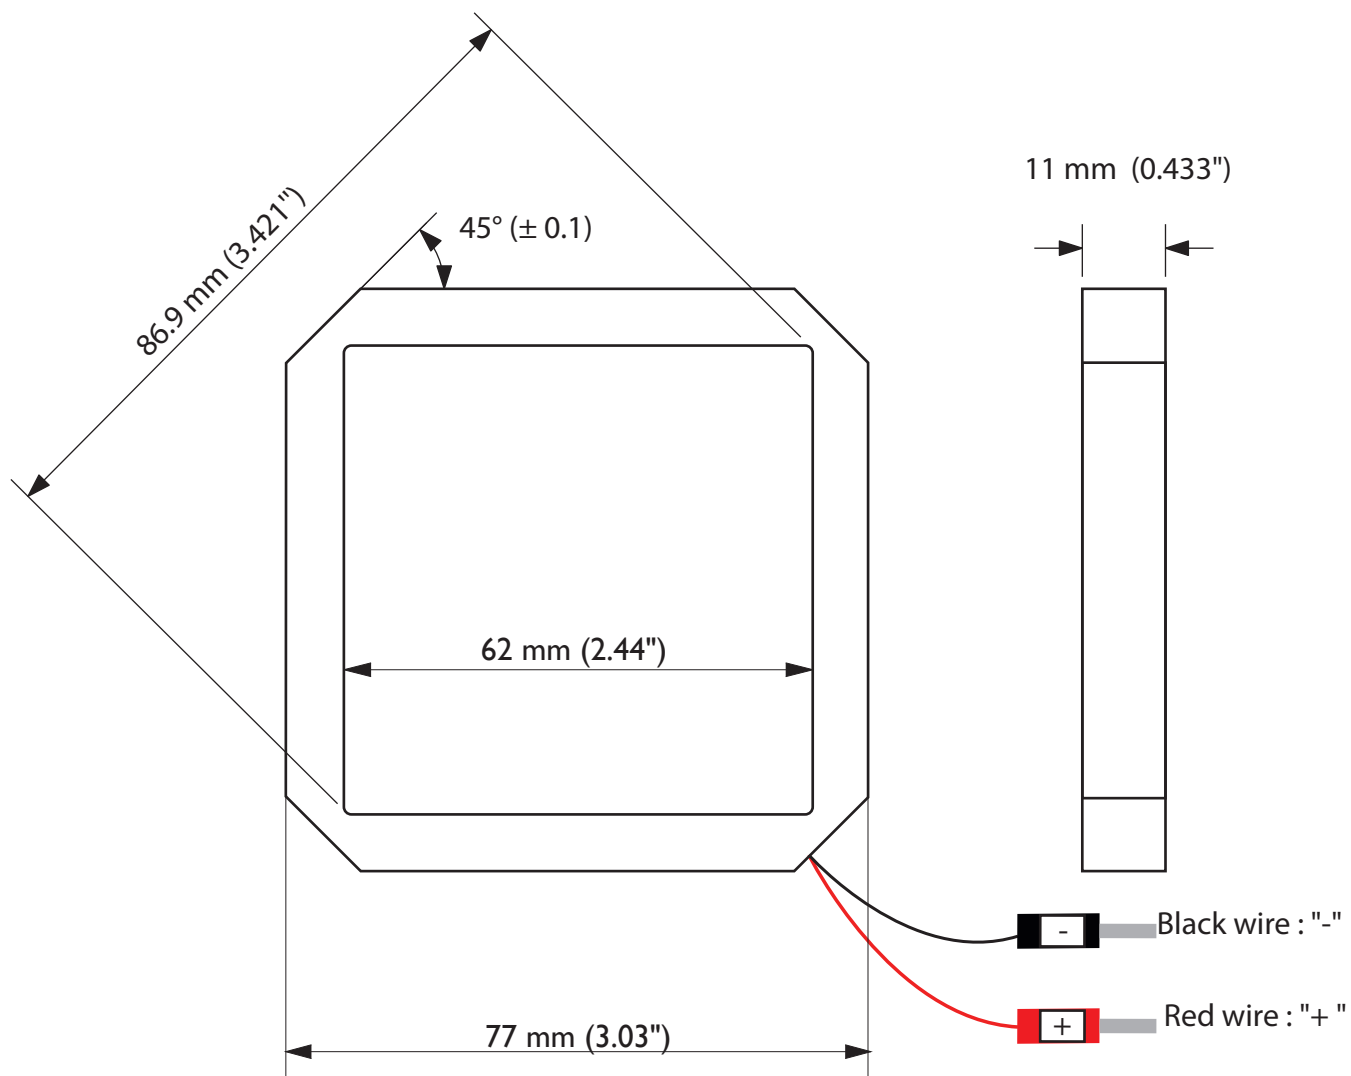

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT		
PHLOX-LEDW-BL-3ATI-A-Q-1R-CUR		 PHLOX
TEL: 04 42 90 76 20 FAX: 04 42 90 76 21	Tolérances générales / general tolerances: ± 0.25 mm	