


A VISION
AHEAD

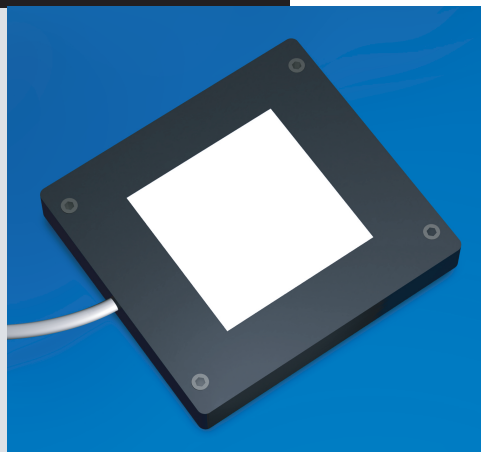

HOW TO READ THE PRODUCT KEY

Manufacturer	Source colour	Light Output Area/Length	Injection process	Input voltage
PHLOX	- LEDW	- BL - 50x50 - LC	- Q - 1R	- 24V
Source type	Product type	Range	Number of light sources/rows per circu	

PHLOX® EXCLUSIVE LIGHT PROCESS
WORLDWIDE PATENT ISSUED

NEW!

LC White led Backlight 50x50

LESS THAN 30% LUMINANCE LOSS AFTER 50 000 HOURS (*)

00000170 : PHLOX - LEDW - BL - 50x50 - LC - Q - 1R - 24V

Illumination

Luminance minimum
Uniformity minimum
Source Type
Colour Temperature
Light Angular Distribution
Expected Life

≥ 20000 cd/m² continuous mode
≥95% (+/- 10%)
White LED
5700°K (+/-500)
Lambertian
➢ 40 000 hours

Scan for DS
and 3D Files !



Electrical


Input Voltage
Input Current
Cable length
Connector
Cable pinout
CE Conformity
Strobe mode

24 VDC (continuous mode)
≤200 mA (continuous mode)
2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
None
+
Yes
Max. Cur: 1A / Pulse Width: 10ms / Duty Ratio: 1/10

Outer unit

L x W x H
Housing Material
Weight
Mounting

90 x 85 x 8.5 mm (3.54 x 3.35 x 0.334")
Black Anodized Aluminium
120 g (4.2 oz)
4 bore holes (D8 for the first 3.5 mm of height,
D4 for the other 5.5 mm)

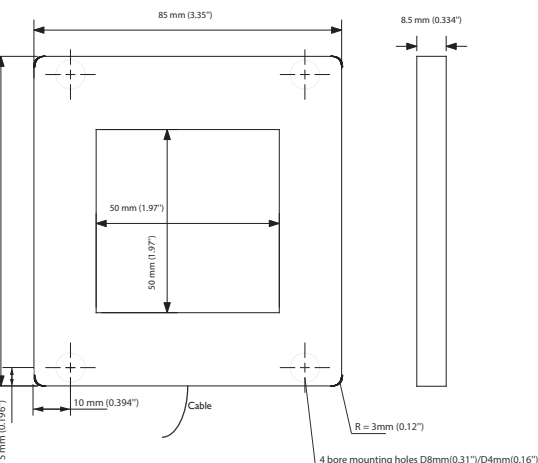

LLUB Backlights by PHLOX® offer the **best life cycle**, the **best chromaticity stability** and the **best luminance on the market**, all in an ultra compact and body. **PHLOX®** is the only manufacturer to provide unifor-mity and luminance datas on the quality control seal positioned at the back of every backlight.

DESIGNED

FOR YOUR APPLICATION

Bottle inspection (glass and plastic)
Particle measurement
Picture digitalization
Dimensional control
Shaping control
Quality control with transparency.

& YOUR INDUSTRIAL SECTOR


Glassmaking
Pharmaceutical/Cosmetics
Automotive
Agribusiness
Electronics
Aeronautics and space.

Environmental

Max. Operating Humidity
Operating Temperature
Storage Temperature
Shelf life
Max.temp.on housing

95% non-condensing
50°C (122°F) max
60°C (140°F) max
12 months from date of purchase
+80°C (+176°F)

area of temperature measurement
30mm all along the edges of the back of
the black anodized aluminium housing
(see image)



Do not cover the backlight when it's switched on.

Accessories

LED Dimmer: 28V-5A very compact and easy to use
Product key: PHLOX DIM LIGHT

Power supply: 110V and 220V
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

LED Strobe: 48V - 5A (up to 40A in pulse mode)
Pulse width between 2µs and 10ms
Product key: PHLOX STROBE LIGHT



CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

RoHS directive compliant

Each PHLOX Backlight is provided with:

- 12 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

Sept 16, 2024

PHLOX • 360 rue Louis Berton - ZAC du Quartier de l'Enfant 13290 AIX-EN-PROVENCE

- FRANCE Tel : +33 (0)4 92 90 76 20 - e-mail: sales@phlox-gc.com

www.phlox-gc.com