

# 940nm

## LLUB (Long life Ultra Bright) Infrared led Backlight 200x200

PHLOX - LEDIR - BL - 200x200 - LLUB - Q - 1R - 24V - 940


### Illumination

Radiance minimum	<b>≥3 W/m<sup>2</sup>.sr continuous</b>
Uniformity minimum	<b>≥95% (+/- 10%)</b>
Source Type	Infrared LED
Wavelength	940 nm (+/- 15)
Light Angular Distribution	30° 1/2 angle
Expected Life	<b>&gt; 100 000 hours</b>

Scan for DS  
and 3D Files !



### Electrical

Input Voltage	24 VDC (continuous mode)
Input Current	≤450 mA (continuous mode)
Cable length	2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
Connector	None
Cable pinout	
CE Conformity	Yes
Strobe mode	Max. Cur: 1.8 A / Pulse Width: 10ms / Duty Ratio: 1/10


### Outer unit

L x W x H	240 x 234 x 8.5 mm (9.45 x 9.21 x 0.334")
Housing Material	Black Anodized Aluminium
Weight	640 g (22.54 oz)
Mounting	4 bore holes (D8 for the first 3.5 mm of height, D4 for the other 5 mm)

### Environmental

Max. Operating Humidity	95% non-condensing
Operating Temperature	50°C (122°F) max
Storage Temperature	60°C (140°F) max
Shelf life	12 months from date of purchase
Max.temp.on housing	+80°C (+176°F)

area of temperature measurement  
30mm all along the edges of the back of  
the black anodized aluminium housing  
(see image)



Do not cover the backlight when it's switched on.

### Accessories

**LED Dimmer:** 28V-5A very compact and easy to use  
Product key: PHLOX DIM LIGHT

**Power supply:** 110V and 220V  
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

**LED Strober:** 28V - 5A (up to 40A in pulse mode)  
Pulse width between 2µs and 10ms  
Product key: PHLOX STROBE LIGHT




CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

**RoHS** directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity
- Seal of quality on the back

July 24, 2018

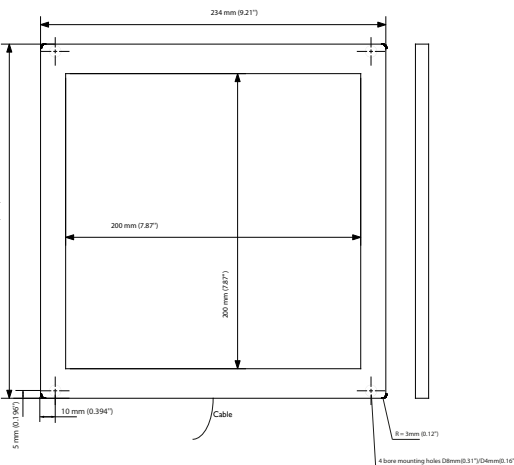

**LLUB Backlights by PHLOX®** offer the **best life cycle** and the **best uniformity on the market**, all in an ultra compact and **IP-65 body**.

**PHLOX®** is the only manufacturer to provide uniformity and radiance datas on the quality control seal positioned at the back of every backlight.


### DESIGNED

#### FOR YOUR APPLICATION

- Bottle inspection (glass and plastic)
- Particle measurement
- Dimensional control
- Shaping control
- Quality control with transparency.

### & YOUR INDUSTRIAL SECTOR

- Glassmaking
- Pharmaceutical/Cosmetics
- Automotive
- Agribusiness
- Electronics
- Aeronautics and space.

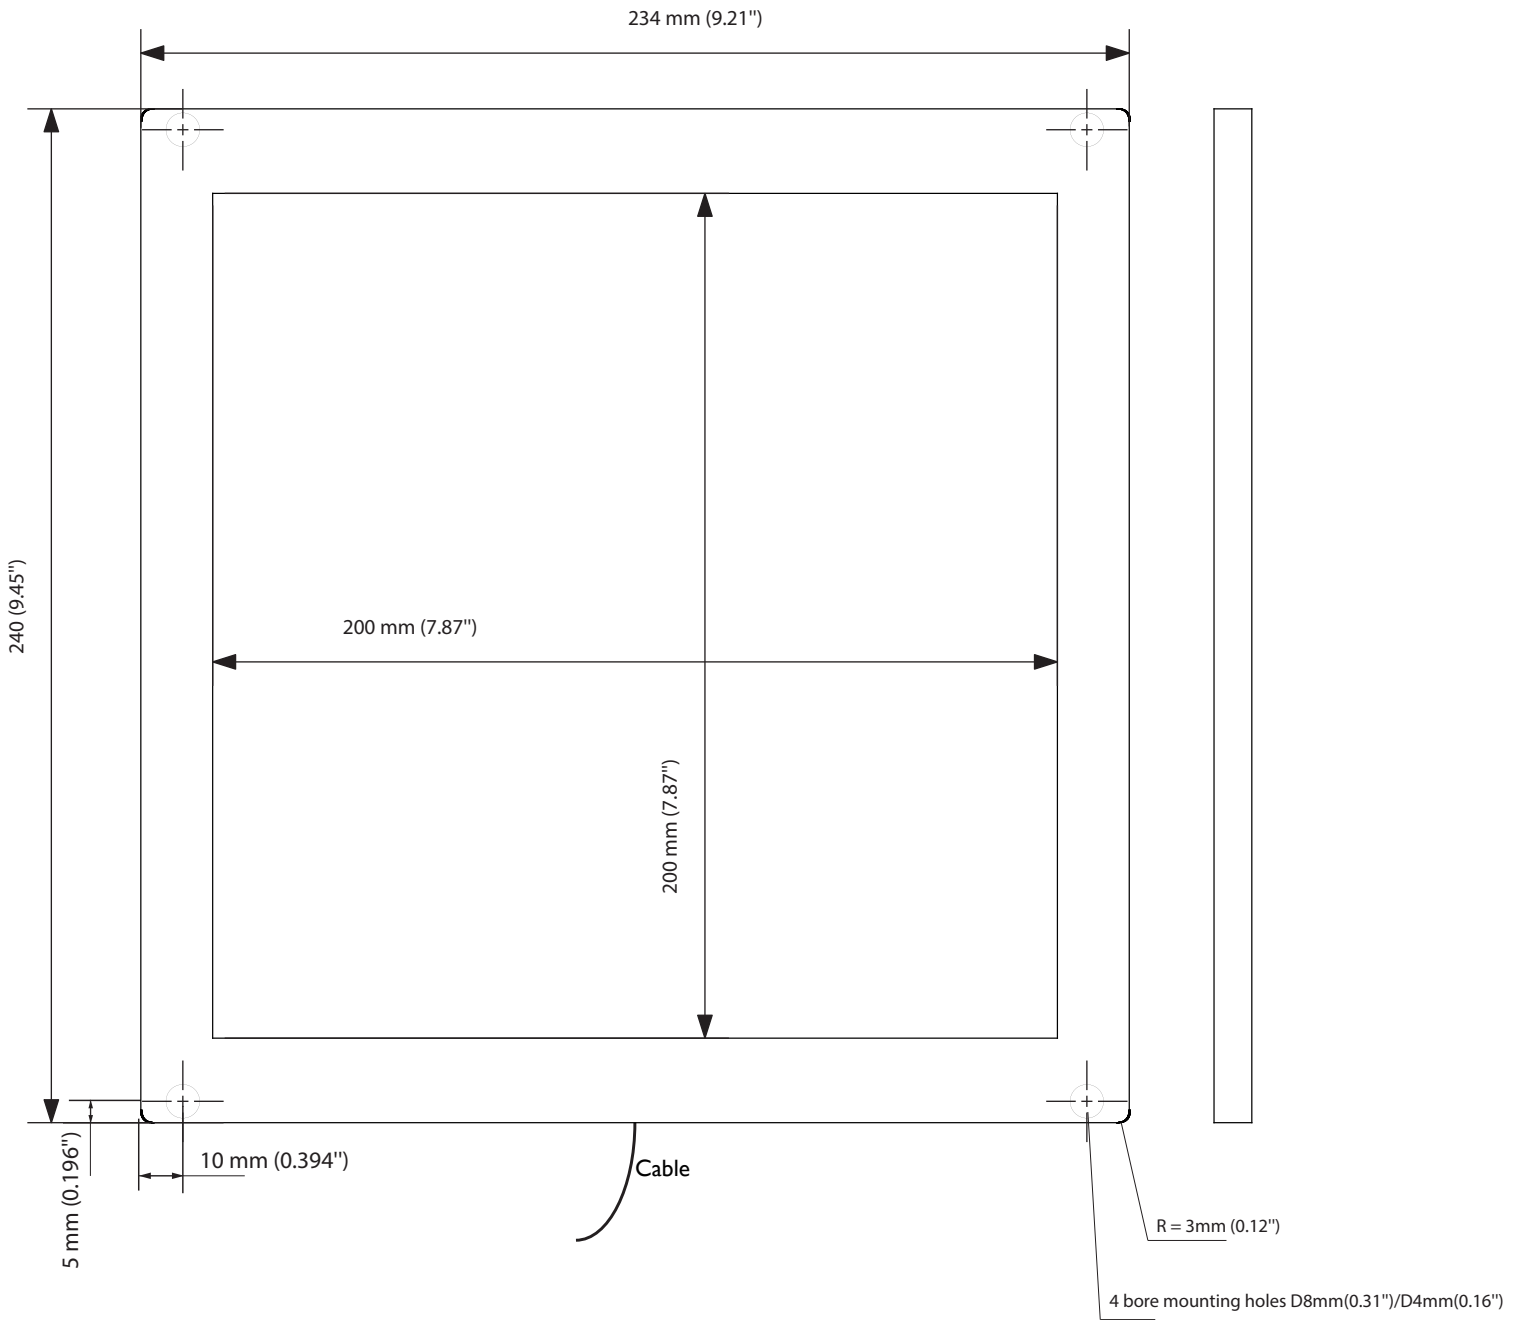

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

PHLOX-LEDIR-BL-200X200-LLUB-Q-1R-24V

TEL: 04 42 90 76 20  
FAX: 04 42 90 76 21

