

Manufacturer	Source colour	Light Output Area/Length	Injection process	Input voltage
PHLOX	LEDW	BL - 300x220	LLUB	Q - 1R - 24V-V2
Source type	Product type	Range	Number of light sources' rows per circu	


PHLOX® EXCLUSIVE LIGHT PROCESS  
WORLDWIDE PATENT ISSUED

**NEW!**

# LLUB (Long life Ultra Bright) White led Backlight 300x220

LESS THAN 20% LUMINANCE LOSS AFTER 100 000 HOURS (\*)  
LESS THAN 10% CHROMATICITY SHIFT AFTER 100 000 HOURS (\*)

00000547 : PHLOX - LEDW - BL - 300x220 - LLUB - Q - 1R - 24V-V2

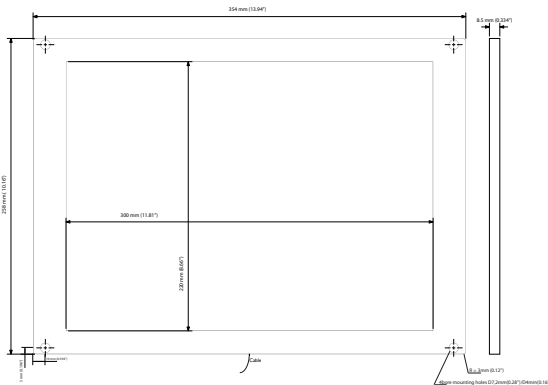


## Illumination

Luminance minimum	<b>≥20 000 cd/m<sup>2</sup> continuous mode</b>
Uniformity minimum	<b>≥95% (+/- 10%)</b>
Source Type	White LED
Colour Temperature	5700°K (+/-500)
Light Angular Distribution	30° 1/2 angle
Expected Life	<b>&gt; 100 000 hours</b>

Scan for DS  
and 3D Files !



## Electrical

Input Voltage	24 VDC (continuous mode)
Input Current	≤2 A (continuous mode)
Cable length	2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
Connector	None
Cable pinout	
CE Conformity	Yes
Strobe mode	<b>Available in option</b>


## Outer unit

L x W x H	354 x 258 x 8.5 mm (13.94 x 10.16 x 0.334")
Housing Material	Black Anodized Aluminium
Weight	1 020 g (35.98 oz)
Mounting	4 bore holes (D7,2mm for the first 3.5mm of height, D4 for the other 5mm)

## Environmental

Max. Operating Humidity	95% non-condensing
Operating Temperature	50°C (122°F) max
Storage Temperature	60°C (140°F) max
Shelf life	12 months from date of purchase
Max.temp.on housing	+80°C (+176°F)

area of temperature measurement  
30mm all along the edges of the back of  
the black anodized aluminium housing  
(see image)



Do not cover the backlight when it's switched on.

## Accessories

**LED Dimmer:** 28V-5A very compact and easy to use  
Product key: PHLOX DIM LIGHT

**Power supply for Dimmer :**

00000728 : POWER SUPPLY DIMLIGHT 27V-4,4A-120W-EU  
00000729 : POWER SUPPLY DIMLIGHT 27V-4,4A-120W-USA



**Power supply for backlight :** 110V and 220V

Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

**RoHS** directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

January 15th, 2025

LLUB Backlights by PHLOX® offer the **best life cycle**, the **best chromaticity stability** and the **best luminance on the market**, all in an ultra compact and **IP-63 body**. PHLOX® is the only manufacturer to provide uniformity and luminance datas on the quality control seal positioned at the back of every backlight.


## DESIGNED

### FOR YOUR APPLICATION

- Bottle inspection (glass and plastic)
- Particle measurement
- Picture digitalization
- Dimensional control
- Shaping control
- Quality control with transparency.

## & YOUR INDUSTRIAL SECTOR

- Glassmaking
- Pharmaceutical/Cosmetics
- Automotive
- Agribusiness
- Electronics
- Aeronautics and space.

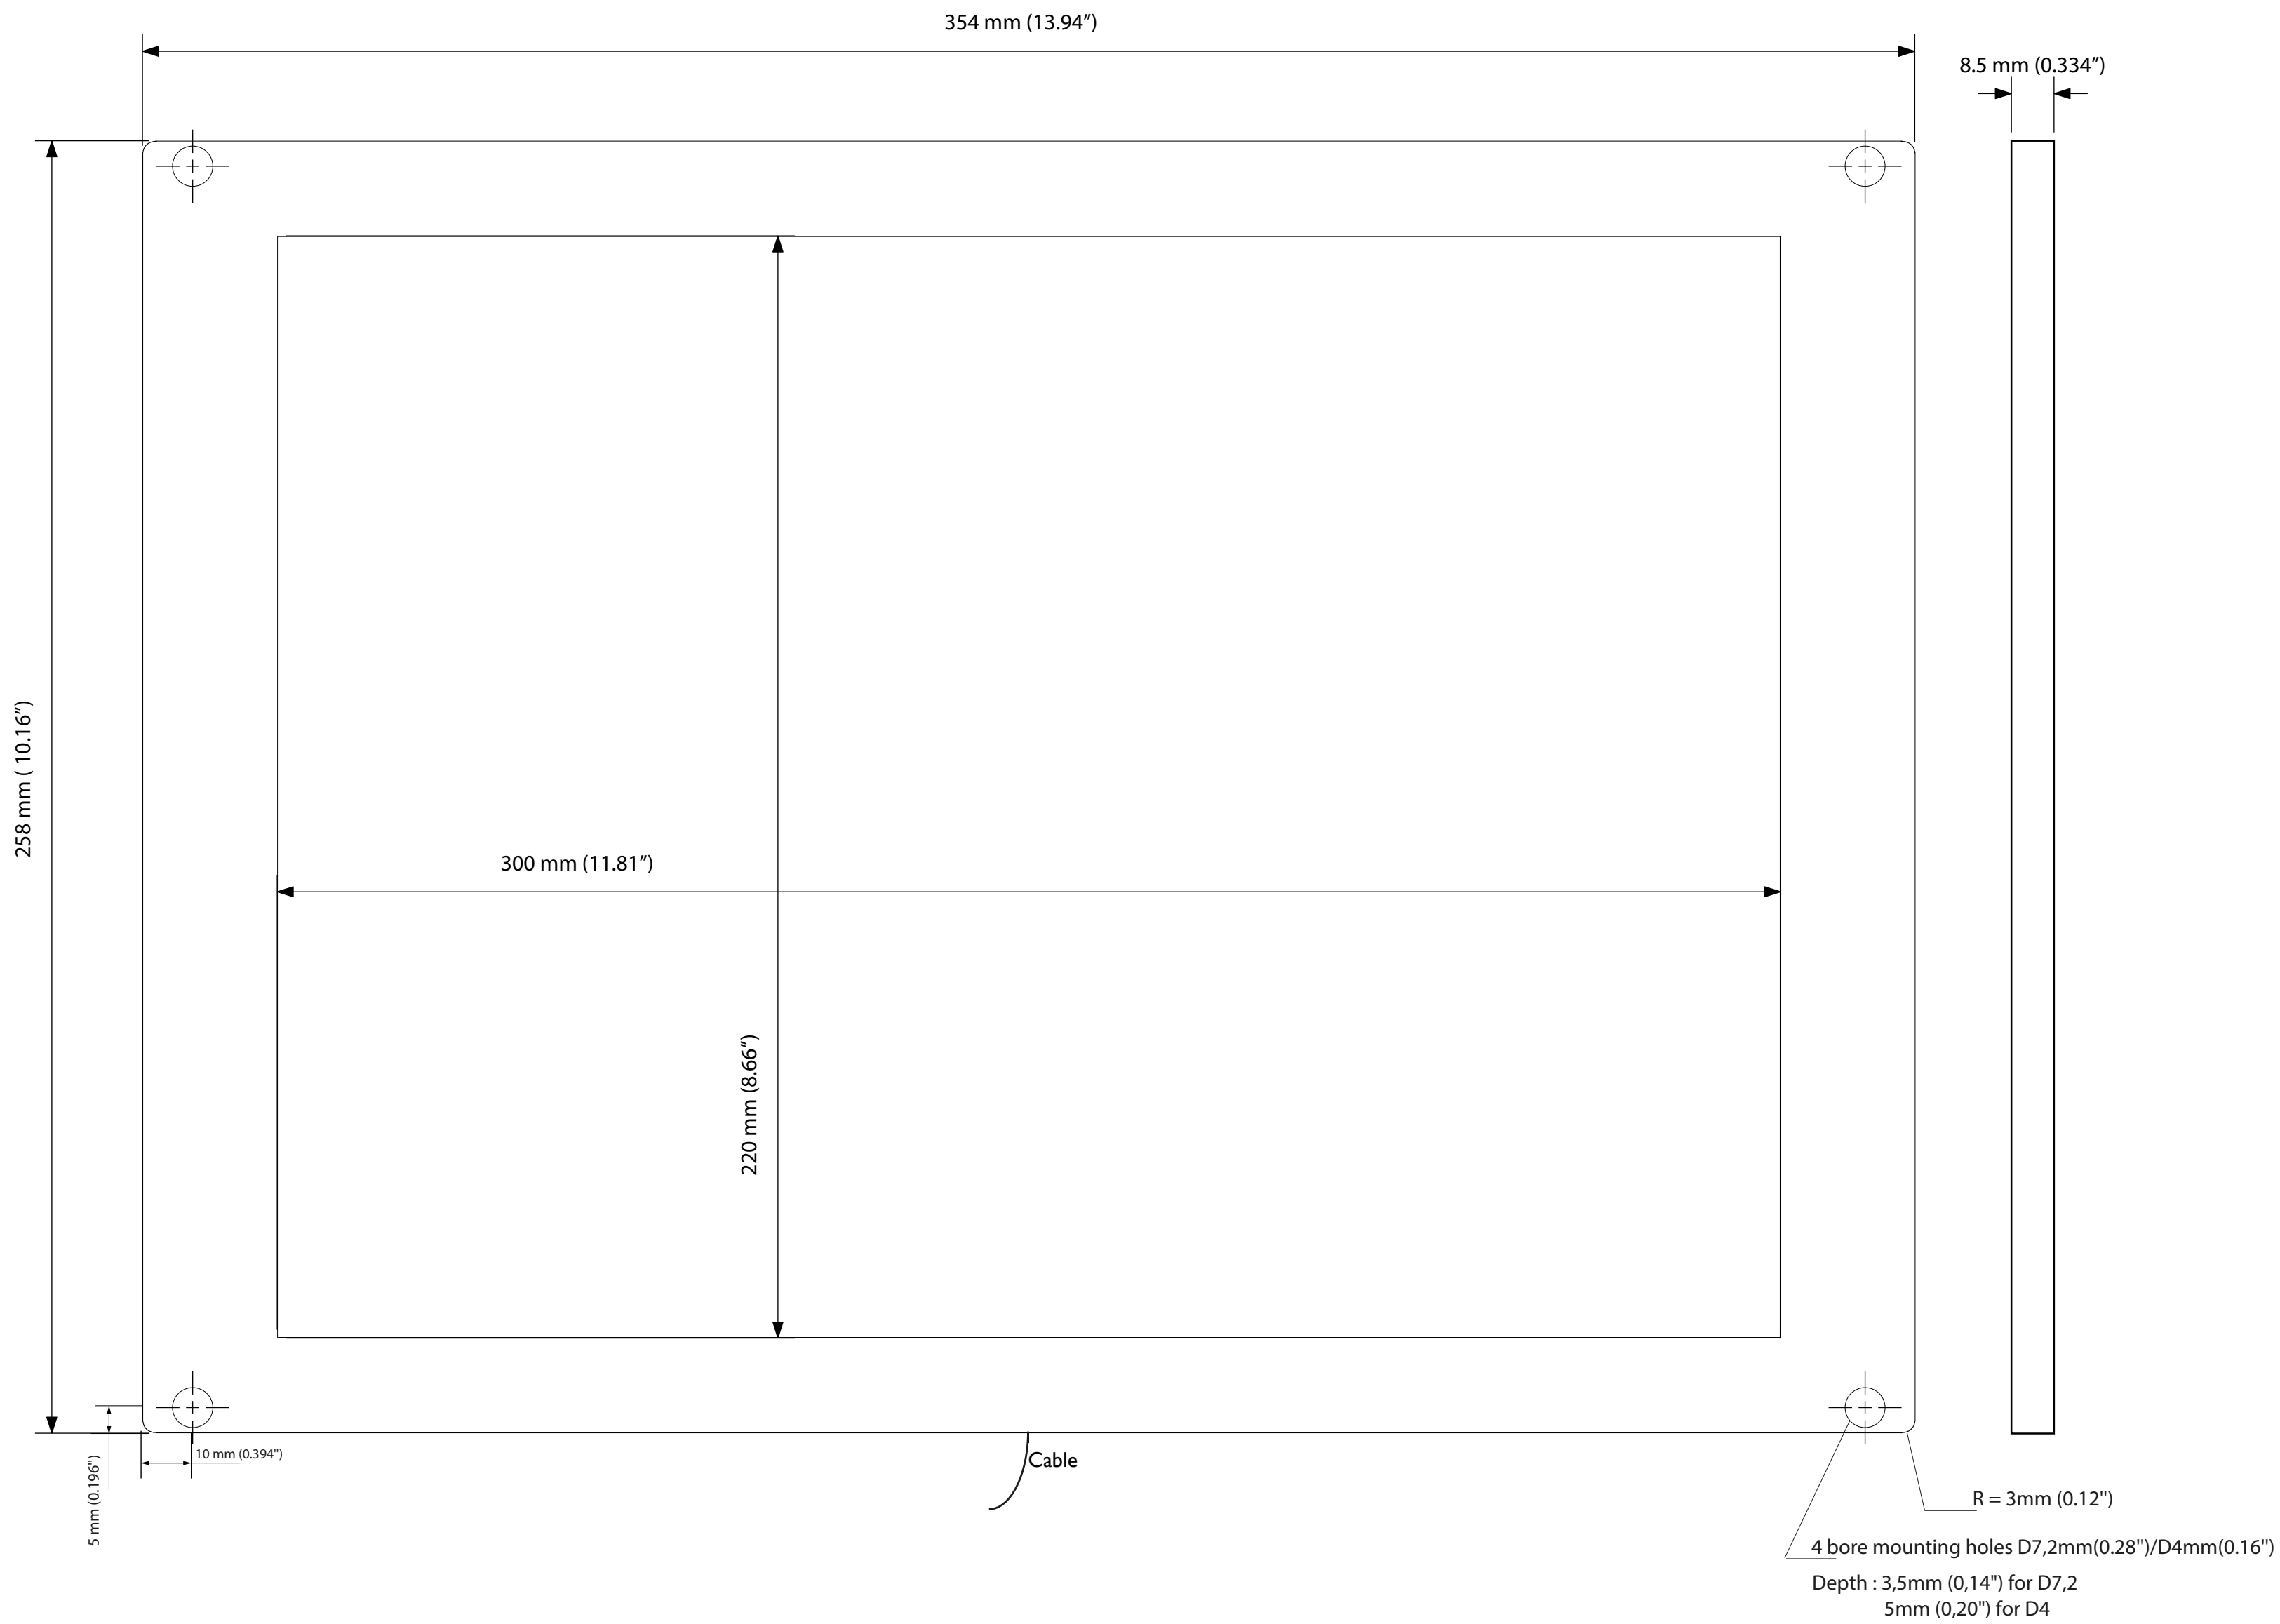

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

00000547 : PHLOX-LEDW-BL-300X220-LLUB-Q-1R-24V-V2

TEL: 04 42 90 76 20  
 FAX: 04 42 90 76 21

